

CRIMPER ROLLERS


Model "CRS"

Benefits Include:

- Cover crop management
- Ideal for organic farming
- Reduces the use of herbicides
- Prevents soil erosion
- Reduces water evaporation from soil
- Saves time

Specs:

- Cat II 3 point hitch
- 12 blades per drum (7-3/4" Spacing)
- 1/4" thick replaceable blades
- 30" diameter crimp rollers

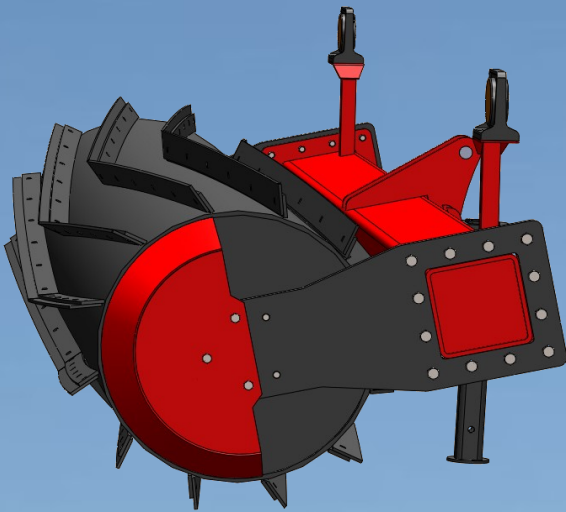

| Available Sizes: | Dry Weight: | Weight with 2/3 filled with water (recommended) |
|------------------|-------------|---|
| 8ft to 16ft | 233 lbs /ft | 353 lbs /ft |

37452 Glen's Hill Road R.R. #2 Auburn, ON Canada N0M 1E0

Ph: 519.529.7212 Fax: 519.529.3277 Email: info@smythwelding.com

www.smythwelding.com



CRIMPER ROLLERS



CRV Model

Model "CRV"

The Smyth "CRV" series Crimper Rollers (**shown**) are similar to our "VS" series land rollers.

The Smyth "CRV" models incorporate all the necessary design features to make it last for many years to come. Features like the 1-1/2" diameter (greaseable) wing pivot pins, 4 extra wide wheel lift bushings. Safety features include, transport lighting, and our high pressure 4" x 10" cylinder with unique over center lift, requires no lock-up's, and sequences unfold. Example: Wings completely unfold before center drum is lowered.

We also offer a "CRX" Model (**X-Fold**) Crimper Roller. This model is similar to our "XS" series land roller. This model is loaded with features such as transport lighting, adjustable tongue, and 2" wing pivot pins, and 4 wheel mono frame design, which means virtually no tongue weight!

(CRX Model Picture Not Shown)

| Model: | Sizes Available: | Weight: |
|--------|------------------|-------------|
| CRV | 22ft to 34ft | 267 lbs /ft |
| CRX | 30ft to 47ft | 281 lbs /ft |
| CRDF | 48ft to 61ft | 295 lbs /ft |

- 12 blades per drum (7-3/4" spacing)
- 1/4" thick replaceable blades
- 30" diameter crimp rollers
- Each section of the 12' main is made up of (2) 6' pieces to form a chevron shape for easy rolling.



CRV Model

37452 Glen's Hill Road R.R. #2 Auburn, ON Canada N0M 1E0

Ph: 519.529.7212 Fax: 519.529.3277 Email: info@smythwelding.com

www.smythwelding.com

